



OMEGA

PERFORMANCE

- **POWER:** Glass fiber cords provide superior power capacity.
- **DURABILITY:** Fabric cover increases wear and oil resistance.
- **LOW-NOISE:** OMEGA tooth design and fabric cover for quieter operation.
- **VERSATILITY:** Fits HTD® and RPP® pulleys.
- **TRUE-RUNNING:** Counter rotated cords ensure the belt does not have a pull bias.
- **TEMPERATURE:** -22 to 212°F operational range




SECTION / PITCH LENGTHS

- 3M / 111-1692 mm
- 5M / 180-2525 mm
- 8M / 288-3600 mm
- 14M / 966-4578 mm



DOUBLE SIDED
AVAILABLE

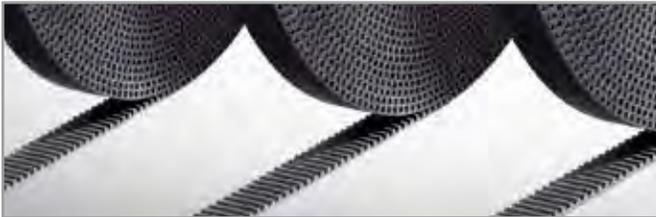

LINEAR

OPTIBELT's timing belt range is also available in linear rolls, in OMEGA and ZR single or double sided. Additional options available. Contact an OPTIBELT representative for more information.



STD

Traditional STD® tooth profiles available.



SECTION / PITCH LENGTHS

- 3M / 120 – 633 mm
- 5M / 255 – 2000 mm
- 8M / 440 – 3200 mm
- 14M / 1400 – 5012 mm



DOUBLE SIDED
AVAILABLE



HTD

Traditional HTD® tooth profiles available.



SECTION / PITCH LENGTHS

- 3M / 111-1692 mm
- 5M / 180-2525 mm
- 8M / 288-3600 mm
- 14M / 966-4578 mm